


Für diese Zeichnung gelten die Bestimmungen über den Schutz für Urheberrecht.

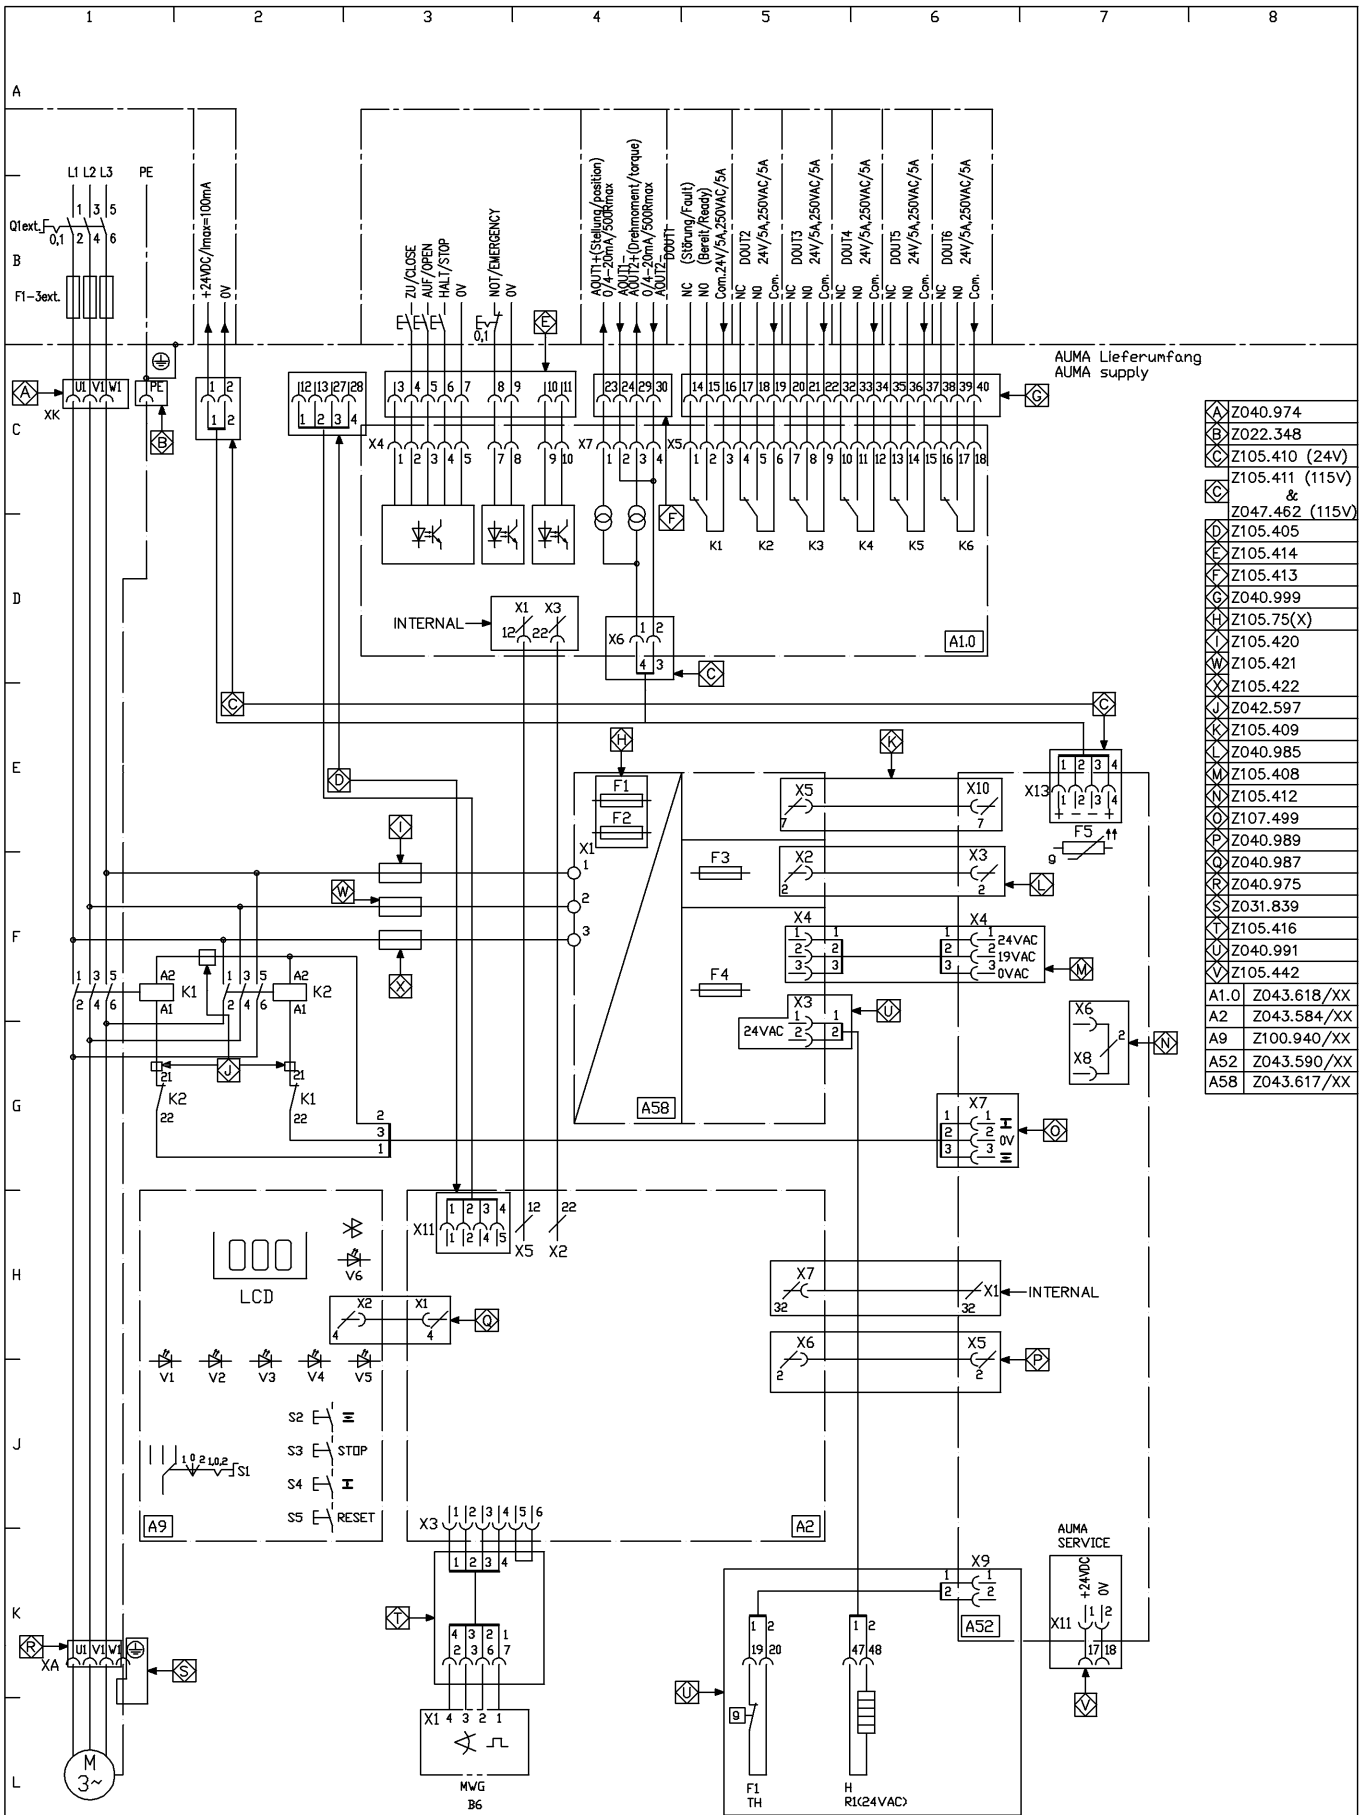

A	Z040.974
B	Z022.348
C	Z105.410 (24V)
D	Z105.411 (115V)
E	Z047.462 (115V)
F	Z105.405
G	Z105.414
H	Z105.413
I	Z040.999
J	Z105.75(X)
K	Z105.420
L	Z105.421
M	Z105.422
N	Z042.597
O	Z105.409
P	Z040.985
Q	Z105.408
R	Z105.412
S	Z107.499
T	Z040.989
U	Z040.987
V	Z040.975
W	Z031.839
X	Z105.416
Y	Z040.991
Z	Z105.442
A1.0	Z043.618/XX
A2	Z043.584/XX
A9	Z100.940/XX
A52	Z043.590/XX
A58	Z043.617/XX

Bei Ex-Antrieben werden an Stelle der Stecker Schraubklammern / Käfigzugfederklammern verwendet!
 For explosion-proof actuators terminals / cage clamps are used instead of plug / socket connector!

Date	11/19/2012	 Wiring Diagram	TPCA-3A2-1C1-A000	Legend	Order Line Item
Draft	MG			TPCABLE-CSA-ASSY	Order Number
Check	PM 11/12				
Rev	Description	Date	Name	First Issue	2012.11.19
					Project